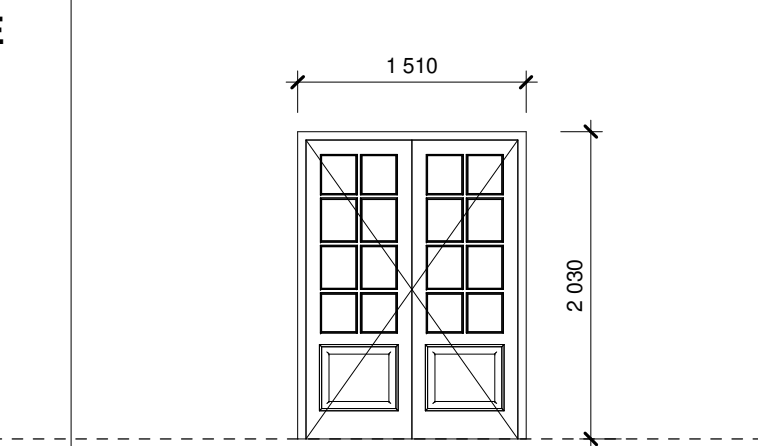


DOOR SCHEDULE	
DESCRIPTION	Existing steel door frame with existing timber door leaf
QUANTITY	2
DOOR NUMBER	EXD1
DOOR FRAME	Existing standard rebated mild steel double door frame to be serviced. Existing loose and flaking paint to be removed, sanded and treated with Plascon or similar approved Polycell end Rust application and cleaned as per manufacturers specification. Strike plate recess to be painted.
DOOR FRAME FINISH	Apply Plascon or similar approved mild steel primer as required, one coat merit universal undercoat and finish with two coats gloss enamel paint. Colour – to be confirmed by Architects.
DOOR LEAF	Existing timber double door cottage pane door leafs.
DOOR LEAF FINISH	Prepare and apply three coats Plascon or similar approved Woodcare wood preservative, product code FPR range or similar approved finish to all surfaces. Finish – clear suede finish.
DOOR STOP	Union/Assa Abloy or similar approved AL8730AS floor mounted door stop to each door leaf. Position to be confirmed on site.

[illegible]